



CHANNELS

EN (EUROPEAN)

- Taper Flange Channels (UPN)

SULB

- Taper Flange Channels (UPSL)

JIS (JAPANESE)


- Taper Flange Channels





EN Taper Flange Channels (UPN)

Dimensions and Masses in accordance with EN 10365. Tolerances in accordance with EN 10279. Surface Condition in accordance with EN 10163-3, class C, subclass 1.

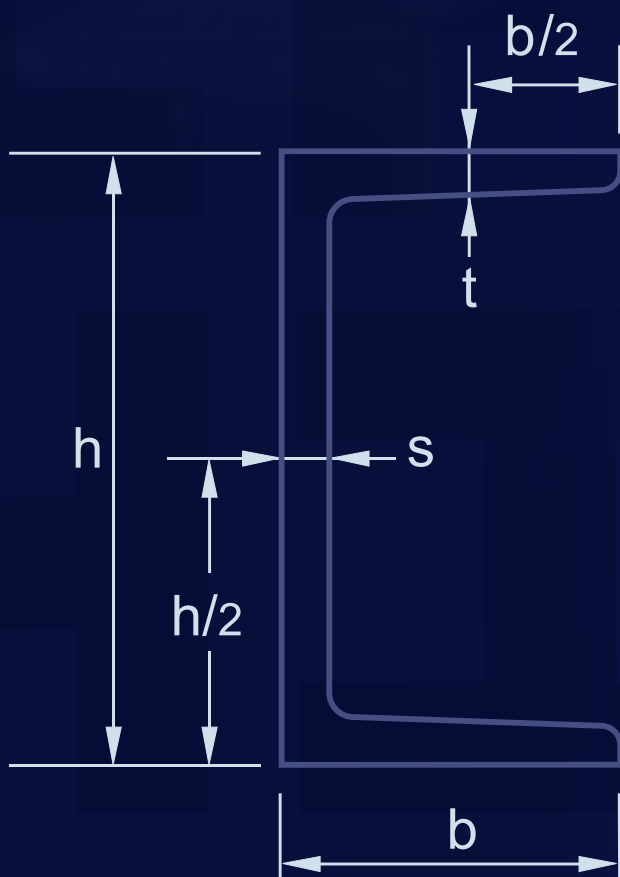




EN Taper Flange Channels (UPN)

Designation	G	Dimensions				A	
	kg/m	h mm	b mm	s mm	t mm	cm ²	
UPN 80	8,6	80,0	45,0	6,0	8,0	11,0	●
UPN 100	10,6	100,0	50,0	6,0	8,5	13,5	●
UPN 120	13,4	120,0	55,0	7,0	9,0	17,0	●
UPN 200	25,3	200,0	75,0	8,5	11,5	32,2	●



SULB Taper Flange Channels (UPSL)

Dimensions and Masses in accordance with SULB standard. Tolerances in accordance with EN 10279. Surface Condition in accordance with EN 10163-3, class C, subclass 1.

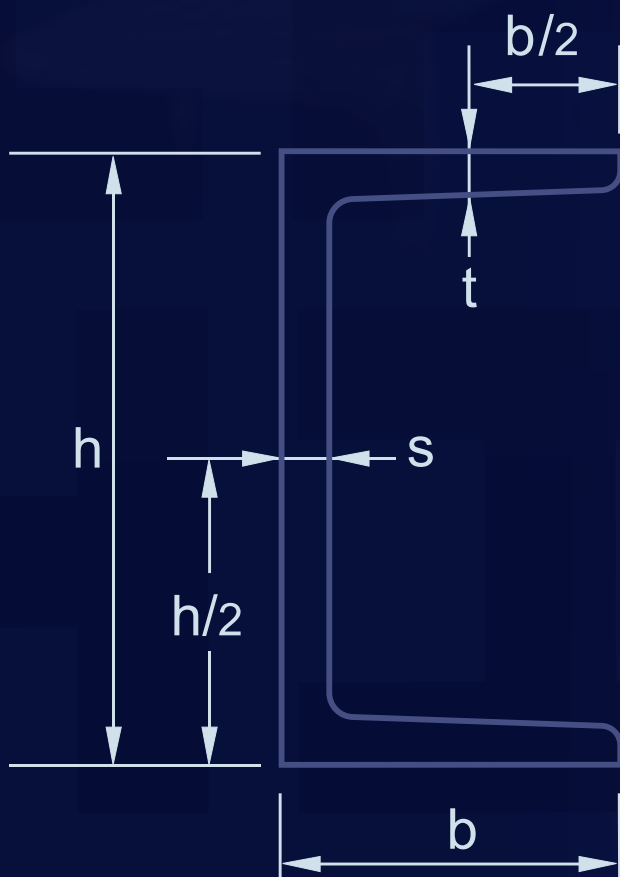




SULB Taper Flange Channels (UPSL)

Designation	G	Dimensions				A	
	kg/m	h mm	b mm	s mm	t mm	cm ²	
UPSL 80	7,1	80,0	44,0	4,5	6,0	11,0	●
UPSL 100	7,7	100,0	47,0	4,1	5,7	13,5	●
UPSL 120	10,4	120,0	52,0	4,8	7,5	17,0	●
UPSL 200	18,4	200,0	75,0	5,2	9,0	32,2	●



JIS Taper Flange Channels

Dimensions, Masses, Tolerances and Surface Condition in accordance with JIS G 3192.

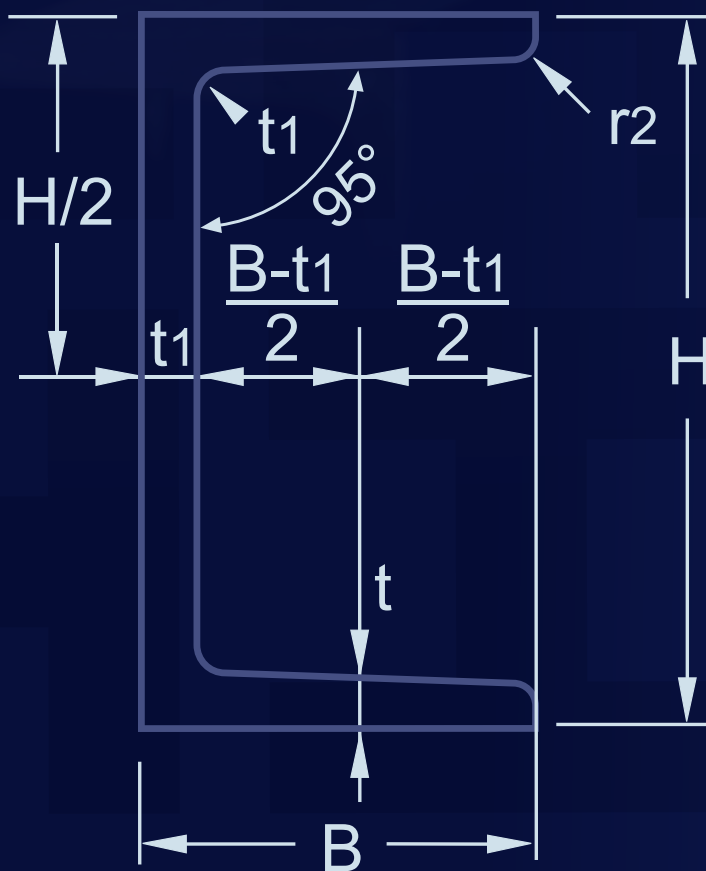



JIS Taper Flange Channels

Bahrain Rolling Mill ●
Saudi Arabia Rolling Mill ●

Designation	Mass kg/m	Dimensions					A cm ²	
		H x B mm	t ₁ mm	t ₂ mm	r ₁ mm	r ₂ mm		
100 x 50	9,36	100 x 50	5	7,5	8	4	11,92	●



GENERAL ENQUIRIES

P.O. Box 50177
Hidd, Kingdom of
Bahrain

 +973 17 352 406
 info@sulb.com
 www.sulb.com




BAHRAIN OFFICE



 +973 17 352 415
 sales@sulb.com.bh



SAUDI ARABIA OFFICE

 +966 13 358 6666
 sales@sulbsaudi.com.sa

UAE OFFICE

 +971 4 5587 235/239
 sales@sulb.com.bh